

For Use With PC740 Relay





FEATURES

- Hold Down Clips Included
- Flame Retardance Material
- RoHS Compliant



SPECIFICATIONS

Rated Current	30 A
Rated Voltage	300 V
Insulation Strength	2500V/S
Insulation Breakdown Voltage	≥ 3000 V
Operational Temperature	-40°C to 75°C
Socket material	Flame Retardance - PA66+GF(V1/V0)
Contact Spring Material	QSn6.5-0.1
Hold Down Spring	Included

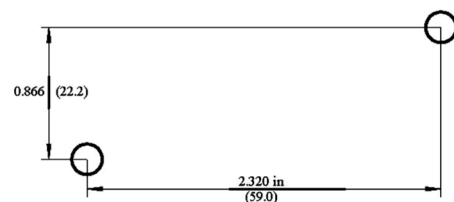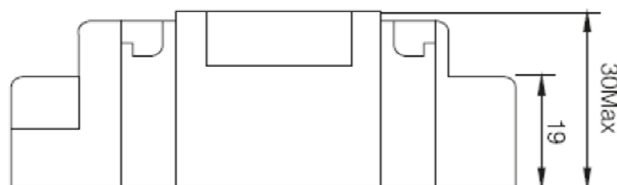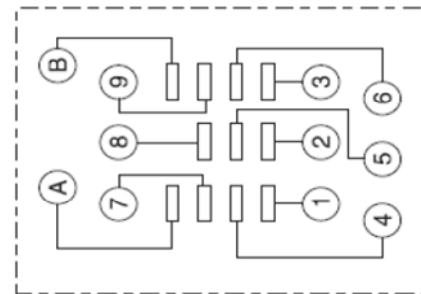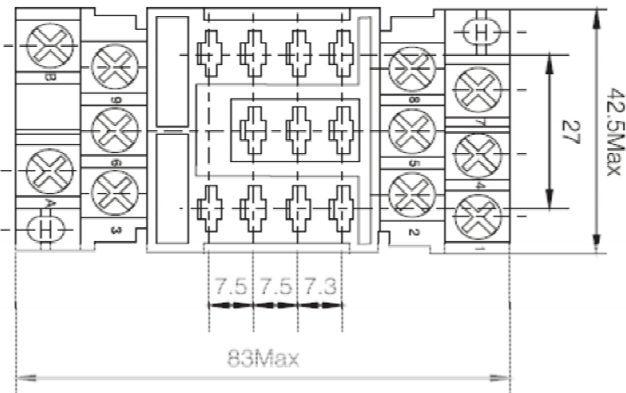

ORDERING INFORMATION

SC740-3C; Socket with Finger Safe Terminals