


Low Profile Minature PCB Power Relay

PC375



FEATURES

- Up to 16 Amp contact capacity
- Rated up to 277 VAC
- 5 KV dielectric strength between coil and contacts
- 1 Form A to 2 form C contact forms available
- Low profile design, .62 in. tall
- Meets UL 873 spacing
- Up to 85 degrees C operating temperature
- **Now available Lead Free & RoHS Compliant**



File # E86876

UL/CUR RATINGS

Version	1	2	3	4
General Purpose	12 A/250 VAC 12 A/30 VDC	12 A/250 VAC	16 A/250 VAC 16 A/30 VDC	8 A/277 VAC 8 A/30 VDC
Cycles Tested	100K AC&DC	100K AC&DC	100K AC&DC	100K AC&DC
Max Switching Power	3000 VA	3000 VA	4000 VA	2 x 1250 VA
Max Switching Voltage	380 VAC / 60 VDC			

CONTACT DATA

Material		AgSnO (Silver Tin Oxide)
Initial Contact Resistance		50 milliohms max @ 1A, 6VDC
Service Life	Mechanical	1 X 10 ⁷ Operations
	Electrical	1 X 10 ⁵ Operations

CHARACTERISTICS

Operate Time	7 ms. Max.
Release Time	3 ms. Max.
Insulation Resistance	1,000 megohms min, at 500VDC, 50%RH
Dielectric Strength	5000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts 2500 Vrms, 1 min. between contact poles
Shock Resistance	10 g, 11ms, functional; 100 g, destructive
Vibration Resistance	DA 2 mm, 10-50 Hz
Power Consumption	0.4 Watts or .25 Watts 1 pole 12 amp relay
Ambient Temperature Range	-40 to 85 C, -40 to 130 C storage
Weight	13.5 grams approx.

ORDERING INFORMATION

Example:	PC375	-1C	-12	S	2	H	-X
Model							
Contact Form	1A, 1C, 2A or 2C						
Coil Voltage							
Enclosure	S: Sealed; C: Dust Cover						
Version							
	1: 1 Pole, 12 A; 3.5 mm	2: 1 Pole, 12 A; 5 mm	.250w				
	3: 1 Pole, 16 A; 5 mm	4: 2 Pole, 8 A; 5 mm					
Coil Sensitivity (Only for 1 Pole 12 Amp Version)							
Nil: 400 Mw; H: 250 Mw. Version 2 Only							
RoHS Compliant	Nil: Not RoHS, -X: RoHS Compliant						


COIL DATA

Coil Voltage	Resistance ohms ± 10%	Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)	Continuous Voltage Max. (VDC)
5	61	3.50	0.5	6.5
6	88	4.20	0.6	7.8
9	198	6.30	0.9	11.7
12	351	8.40	1.2	15.6
24	1405	16.8	2.4	31.2
48	5620	33.6	4.8	62.4


Note: Custom coil voltages within the ranges shown are available on special order.

Dimensions in Inches (millimeters)

Side View





5 mm Version




3.5 mm Version


End View




**Bottom View
PC Board Layout**



5 mm SPDT 16 Amp
5 mm DPDT 8 Amp




5 mm SPDT 12 AMP

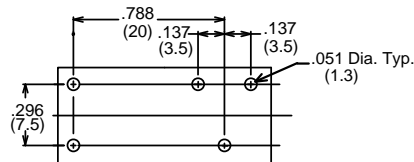


3.5 mm SPDT 12 Amp


Wiring Diagrams



5 mm SPDT 16 Amp



5 mm DPDT 8 Amp



5 mm SPDT 12 Amp
3.5 mm SPDT 12 Amp

Notes:

- Contact Form C shown
- On Contact Forms A & B Unused Pins are Omitted
- Tolerances ± .010 unless otherwise noted



3220 Commander Drive, Suite 102, Carrollton, Texas 75006

Sales: Call Toll Free (888) 997-3933 Fax (818) 342-5296 email: pickerwest@sbcglobal.net URL: pickercomponents.com